

Labilis Rings


DESIGN | PAOLO CASTELLI



Finishes of the above picture



Metal Black
Matt
varnished



Metal Finish
Matt Bronzed
Brass

Tre anelli di diverso diametro installabili singolarmente o in composizione da 4, 7 e 10 anelli. L'anello in metallo è finitura nero opaco con diffusore di luce led in policarbonato opalino bianco perimetrale. Ogni anello monta uno spot in ottone finitura bronzo ottone opaco. Gli anelli presentano tre cavi di sospensione, di cui uno di alimentazione. Cavi elettrici della lunghezza di due mt.

Optionals su richiesta: anelli dimmerabili; rosone cilindrico in metallo con alimentatore interno, adatto per installazione a soffitto.



Rosone cilindrico* per soluzione con installazione degli alimentatori a soffitto (optional).

Cylindrical rose * suitable for installation with ceiling power supplies (optional).

Dim. Ø9 x h 20cm


Three rings in different diameters can be installed separately or as composition (4, 7, 10 rings). The metal ring is in satin black finish, with light diffuser in white opal polycarbonate along the perimeter. Each ring carries a LED spot in mat brass bronze finish. Each ring has three suspension cables, one of which is a power supply one. Electric cables are two meters long.

Optionals available on request: dimmable rings; metal cylindrical rose holding local driver, suitable for ceiling installation.

RING Ø27

TECHNICAL SHEET LABILIS Ø27

Light source: Strip Led 140 Led/m + spot led
Total power: 7,3W - Strip led 14,4W/m; spot 4,2W
Voltage: 230 V
Rated luminous flux spot: 330 Lm
Rated luminous flux strip led: 1092 Lm
Colour temperature: 2700°K
Colour rendering index: 90
Dimmer function: Yes - only for ring
Weight: 2,8 Kg



RING Ø27 | ILL.LABI.231

1 ring Ø27 in metal matt black varnished and led spot in matt bronzed brass
Remote drivers


OPTIONAL*

Metal cylindrical rose holding local driver, suitable for ceiling installation

RING Ø43

TECHNICAL SHEET LABILIS Ø43

Light source: Strip Led 140 Led/m + spot led
Total power: 9,7W - Strip led 14,4W/m; spot 4,2W
Voltage: 230 V
Rated luminous flux spots: 330 Lm
Rated luminous flux strip led: 1755 Lm
Colour temperature: 2700°K
Colour rendering index: 90
Dimmer function: Yes - only for ring
Weight: 4,5 Kg



RING Ø43 | ILL.LABI.221

1 ring Ø43 in metal matt black varnished and led spot in matt bronzed brass
Remote drivers


OPTIONAL*

Metal cylindrical rose holding local driver, suitable for ceiling installation

RING Ø70

TECHNICAL SHEET LABILIS Ø70

Light source: Strip Led 140 Led/m + spot led
Total power: 13,6W - Strip led 14,4W/m; spot 4,2W
Voltage: 230 V
Rated luminous flux spots: 330 Lm
Rated luminous flux strip led: 2857 Lm
Colour temperature: 2700°K
Colour rendering index: 90
Dimmer function: Yes - only for ring
Weight: 7,3 Kg

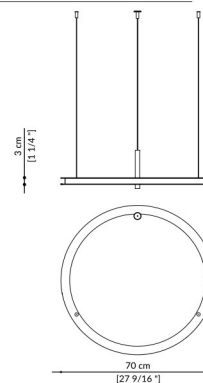

RING Ø70 | ILL.LABI.211

1 ring Ø70 in metal matt black varnished and led spot in matt bronzed brass
Remote drivers

OPTIONAL*

Metal cylindrical rose holding local driver, suitable for ceiling installation